


PSM and PSMU Security Mounts


For Projectors up to 50 lb (22 kg)

1. PSM-UNV models:
±15° tilt, ±15° roll
and 360° swivel
PSMU-PRS models:
+5°/-20° tilt, ±10° roll
and 360° swivel
2. Key-lock security for theft
deterrence
3. Two-piece tray design
prevents access to
security fasteners
4. Easy-access hinge
design for quick projector
removal, enabling lamp
and filter maintenance
5. Top access hole for cable
management
6. Security fasteners
included

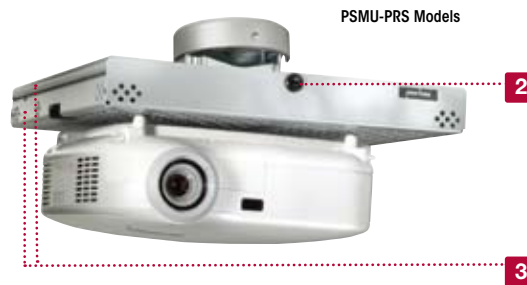

For expanded product information and technical data visit www.peerlessmounts.com

TECHNICAL DRAWINGS

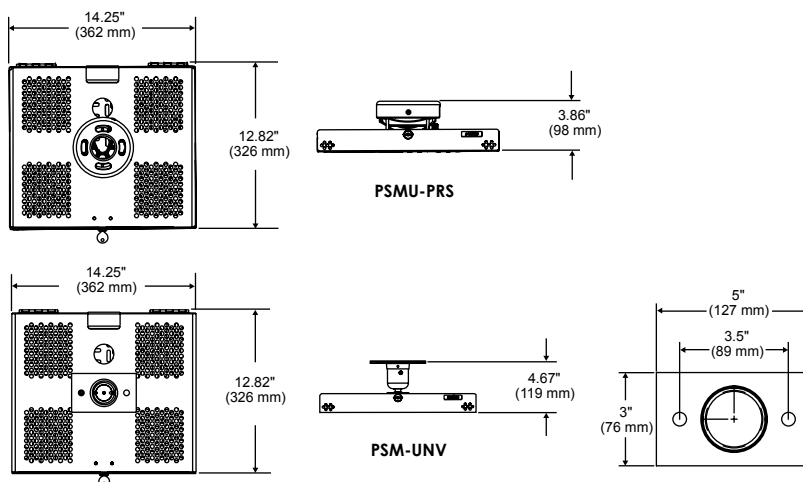

To verify mount compatibility with any LCD, plasma or projector model use MountFinder™ at www.peerlessmounts.com

CLICK: www.peerlessmounts.com CALL: 800.865.2112 FAX: 708.865.2941



PROJECTOR
MOUNTS

MODELS

Universal PSM-UNV Models:

Includes theft resistant hardware for attaching projector to mount

PSM-UNV	Black
PSM-UNV-S	Silver
PSM-UNV-W	White

Universal PSMU-PRS Models:

Includes theft resistant hardware for attaching projector to mount

PSMU-PRS	Black
PSMU-PRS-S	Silver
PSMU-PRS-W	White

PROJECTOR ADAPTER



Mounting pattern

Universal tray pattern
accommodates most projectors

SPECIFICATIONS



Tilt | Swivel | Roll

PSM-UNV Models:	±15° 360° ±15°
PSMU-PRS Models:	+5/-20° 360° ±10°



Max load

PSM-UNV Models:	50 lb (22 kg)
PSMU-PRS Models:	25 lb (11 kg)

Product Dimensions (W x H x D)

PSM-UNV Models:	14.25" x 4.67" x 12.82" (362 x 119 x 326 mm)
PSMU-PRS Models:	14.25" x 3.86" x 12.82" (362 x 98 x 326 mm)

Mounting Surfaces

Wood joist, concrete
and other structures
(Other structures require accessory)

Ship Weight

PSM-UNV Models:	10.4 lb (4.7 kg)
PSMU-PRS Models:	11.5 lb (5.2 kg)

CERTIFICATIONS



ACCESSORIES



ACC, CMJ Models:
Ceiling Platespg# 125, 127



AEC, EXT Models:
Extension Columns pg# 127



PWA-14(S)(W):
Projector Wall Arm pg# 129



ACC810:
Threaded Rod Adapter for use
with PSMU-PRS models pg# 129