

Installation and Assembly - Projector Adapter Plate for Barco™ model IQ-G300 Projector

Models: PAP 141,
PAP 141-S

IMPORTANT! Read entire instruction sheet before you start installation and assembly.

Before you start check the parts list below to make sure all of the parts shown are included.


⚠ WARNING

- Installer must verify that the ceiling will safely support four times the combined weight of all attached equipment and hardware.

Parts List

Description	Qty.	PAP 141	PAP 141-S
AA adapter plate	1	055-1401	055-4401
BB M6 x 1 x 30 mm socket pin screw	1	520-1067	520-2067
CC .250 x .5 x .625H retaining spacer	1	590-1106	590-2106
DD .52 x .80 x .375H plastic spacer	1	540-1036	540-2036
EE 4 mm security allen wrench (for PAP only)	1	560-9646	560-9646

Note: Actual parts may appear slightly different than illustrated.

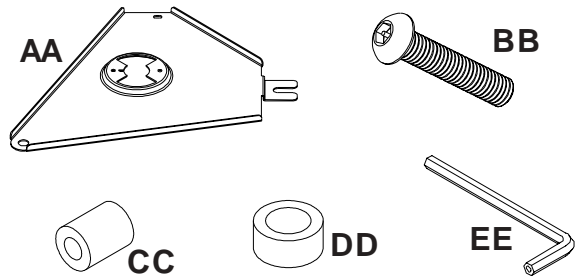

1

*Notch indicates front of projector.

Flip projector upside down. Unscrew back foot of projector halfway and completely remove left foot. Slide adapter plate (**AA**) under back foot of projector and place plastic spacer (**DD**) between projector and adapter plate (**AA**) as shown below. Then fasten adapter plate (**AA**) to projector using M6 screws (**BB**) and one retaining spacer (**CC**). Reattach left front foot and tighten both feet. Tighten M6 screw (**BB**) using 4 mm security allen wrench (**EE**).

