

Installation and Assembly - Projector Adapter Plate for Toshiba™ TDP-D1 Projector, BenQ® PB6100 LCD Projector, and Mitsubishi™ SE2U Projector

Models: PAP 189, PAP 189S, PAP 189W

Before you start check the parts list below to make sure all of the parts shown are included.


IMPORTANT! Read entire instruction sheet before you start installation and assembly.

⚠ WARNING

- Installer must verify that the ceiling will safely support the combined weight of projector mount and video projector.

Parts List

Description	Qty.	PAP 189	PAP 189-S	PAP 189-W
AA adapter plate	1	055-1375	055-4375	055-2375
BB M4 x 12 mm serrated washer head socket pin screw	2	510-1079	510-2079	510-2079
CC M4-.7 x 20 mm thumb screw	1	560-1137	560-7137	560-7137
DD .235 x .375 x .25H retaining spacer	2	590-1129	590-2129	590-2129
EE .240 x .375 x .562H retaining spacer	1	590-1135	590-2135	590-2135
FF M4 x 20 mm serrated washer head socket pin screw	2	510-1061	510-2163	510-2163
GG M4-.7 x 25 mm thumb screw	1	560-1142	560-7142	560-7142
HH .198 x .313 x .750H retaining spacer	1	590-1134	590-2134	590-2134
II .313 x .198 x .5H retaining spacer	2	590-2021	590-2017	590-2017
JJ 4 mm security allen wrench (for PAP only)	1	560-9646	560-9646	560-9646

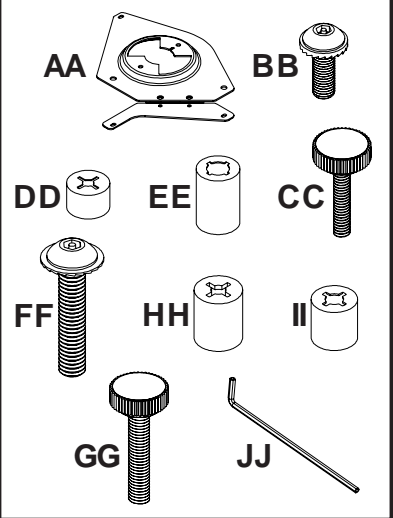

Note: Actual parts may appear slightly different than illustrated.

1 For Toshiba™ TDP-D1 Projector:
Flip projector upside down. Fasten adapter plate (AA) using two M4 x 12 mm screws (BB) and two retaining spacers (DD) as indicated below. Tighten screws with 4 mm security allen wrench (JJ).


For BenQ® PB6100 LCD Projector and Mitsubishi™ SE2U Projector:

Flip projector upside down. Fasten adapter plate (AA) using two M4 x 20 mm screws (FF) and two retaining spacers (II) as indicated below. Tighten screws with 4 mm security allen wrench (JJ).


2 For Toshiba™ TDP-D1 Projector:
Place retaining spacer (EE) on remaining hole on projector. Then close adapter plate (AA) and fasten with thumb screw (CC).

For BenQ® PB6100 LCD Projector and Mitsubishi™ SE2U Projector:

Place retaining spacer (HH) on remaining hole on projector. Then close adapter plate (AA) and fasten with thumb screw (GG).

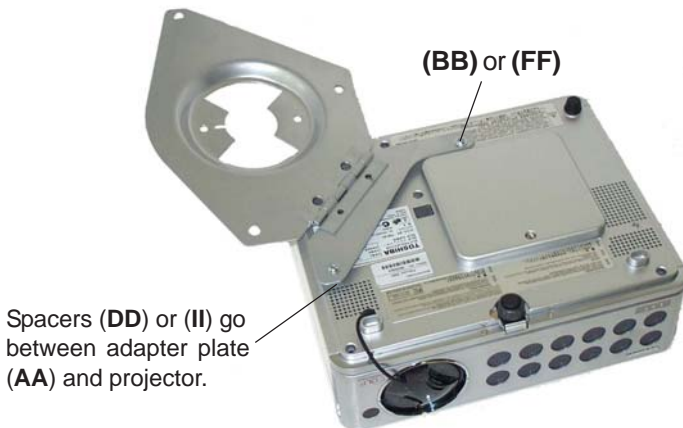

Spacers (DD) or (II) go between adapter plate (AA) and projector.

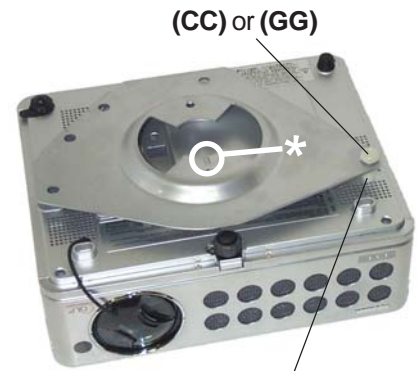

Spacer (EE) or (HH) goes between adapter plate (AA) and projector.